

JUMPMASTER COURSE RIGEX STANDARDS FOR 01 OCT 2024

MOLLE RUCK SETUP PRIOR TO RIGEX.

- MOLLE should be filled completely and weigh no less than 35 lbs so that the top flap of the MOLLE does not overlap the pouch on the front.

-Remove all pouches on exterior of rucksack except for an E-tool or General purpose/Canteen pouch centered and filled.



-The 6 Quick release buckles (3 on each side) on the left and right side of the MOLLE will be secured with the excess rolled or S-folded and secured by either masking tape or retainer bands.



-The waistband will be connected tightly around the MOLLE frame and the excess secured by either masking tape or retainer bands.



-The chest strap will be tightened towards the adjustable shoulder carrying straps and the excess secured with either masking tape or retainer bands.



-The excess webbing on the top of the adjustable shoulder carrying straps should be tightened and secured by either masking tape or retainer bands.



MODULAR AIRBORNE WEAPONS CASE PRIOR TO RIGEX.

-The adjustable nose cone will be properly sized for an M-4 dummy rifle with the butt stock fully collapsed and the nose cone securing straps tightened down.




-The Snap shackle will be adjusted to the 4th rung on the Pouch attachment ladder system with the excess properly stowed in the PALS webbing.



STARTING POSITION FOR THE RIGEX

-Harness single point release can be fully extended and hook pile tape lowering line **MUST** be fully extended. Adjustable D-ring attaching straps, female portion leg strap release assembly must be detached.

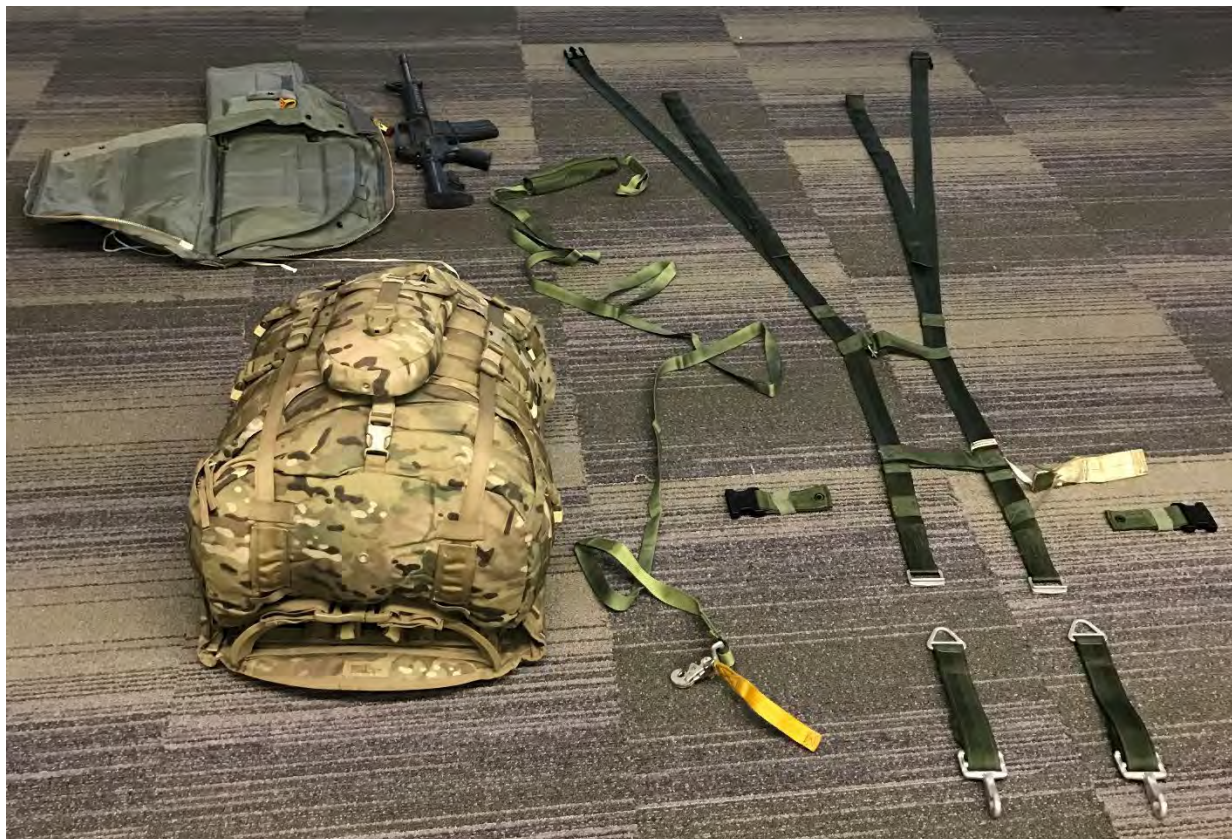

-Adjustable shoulder carrying straps will be fully extended.



-On the MAWC the compression straps and quick release buckles will be fully extended, the opening gate on the snap shackle open and the snap fastener unsecured, the upper tie down tape unsecured and the slide fastener and tabbed thong fully unzipped with the closing flap open.




STANDARDS FOR THE RIGEX

-JMPI Committee members will conduct a technical inspection of both the MOLLE and MAWC following the JMPI sequence as if worn by a jumper.

MOLLE

-The opening on the HSPR must be over the pouch centered on the front of the MOLLE. The equipment retainer strap will be routed through the slots at the top corners of the MOLLE on the outside of the adjustable shoulder carrying straps, in between the adjustable shoulder carrying straps and the comfort pad. The friction adapter will be routed through the large ovals at the bottom of the MOLLE frame and secured with a **2-3 finger quick release** with the excess s-folded. The **chest trap quick release buckle on the MOLLE will be secured under the X made by the equipment retainer straps.**

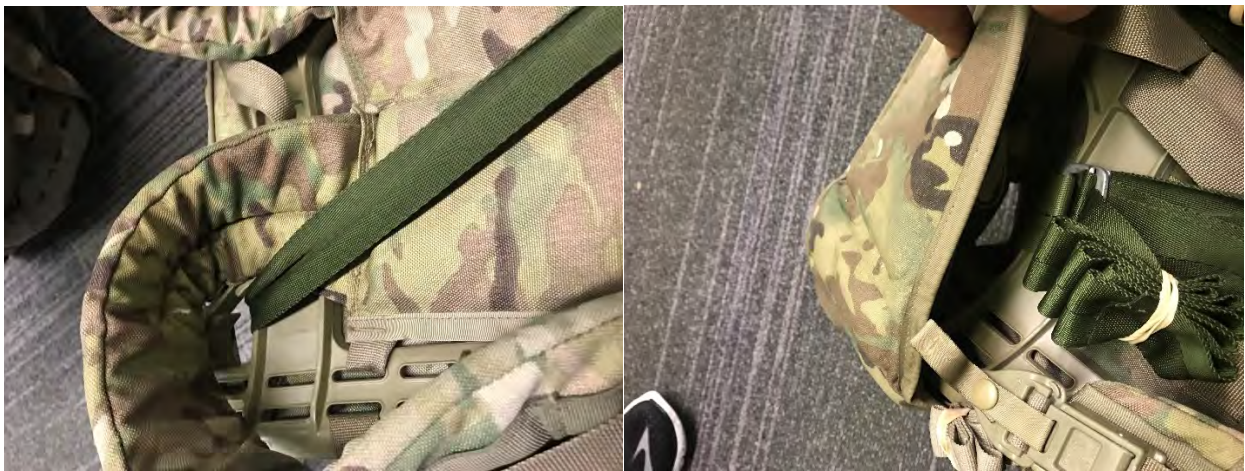

-**No excess** extending past the ends of the retainer flap on the HPT Lowering Line.

MAWC

-The weapon will be oriented appropriately. The adjustable buckles will be secured and the compression straps tightened with the excess secured in the webbing retainer. The opening gate of the snap shackle will be secured by the locking pin, the snap faster on the yellow safety lanyard will be secured. **Slide faster and tabbed thong will be secured to the first rivet pin but not so far as to engage the spring and the snap fastener secured.** The upper tie down tape will be routed through the opening on the tabbed thong and secured on the lead edge of the MAWC with a single or double looped bow knot.



